


RFID Integrated Reader - R40

Product Features

- Compact & Powerful
- Advanced RFID Technology for Faster & Accurate Read Rates - 50 tags/sec
- Read distance - 15 m (Max)
- Built-in Storage
- Android compatible

Specifications

RFID Frequency	856 -867 MHz (UHF - EPC C1G2) * Optional for Global band)
Transmit Power (PoE)	0-30dBm (adjustable)
Operating Mode	Active, Trigger
Read Rate	Up to 50 tag reads per second
Max Read Distance	10 meter (adjustable)
Data Interface	Default : USB / wiegand / RS232 *Optional : Ethernet, WiFi and GPRS*Storage : Yes
Polarization	9 dBi Circular
Antenna Port	Integrated
IP Rating	IP 54
Dimensions	300X300X20 (mm)
Weight	3 kg
Materials	ABS Plastic
Mounting Options	Wall Mount
Power Source (External DC Power)	AC-DC power supply rated for 12Vdc/2.1A
SDK	.NET, ANDROID ,AT COMMAND

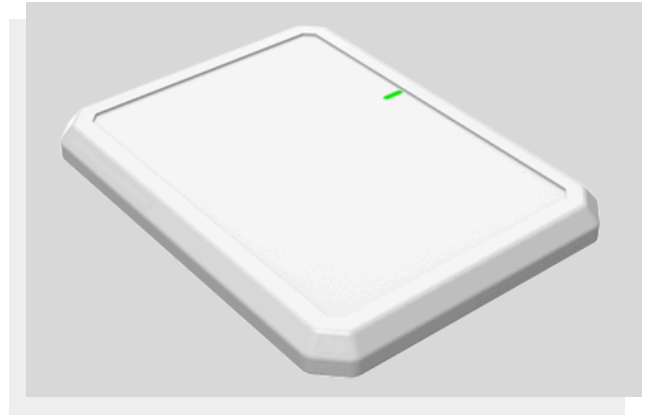

Applications

- Asset Tracking
- Warehouse Management
- Retail Systems
- Manufacturing Industries
- Logistics



Highlights

This is specially designed for high read range applications and it has high gain performance. Lightweight and compact, compatible with all type of UHF tags. No Interference, Amazing Accuracy, Lightning-Fast Readability of RFID tags.

